

BUCHA DE GUIA

ESCOLHA DA LIGA:

DXRY = BRONZE SAE 430B


DXRF = FERRO FUNDIDO COM LUBRIFICANTE SÓLIDO

LIGAS / FORMAS:

DXRY



DXRF



EXEMPLO DE ESCOLHA / DETALHES DA BUCHA DE GUIA:

Tolerâncias: $\varnothing d1 = H7$ | $\varnothing D =$ ver tabela

Liga = DXRY ou DXRF
d1=25mm = 25
C=40mm = 40

Exemplo de código = DXRY2540

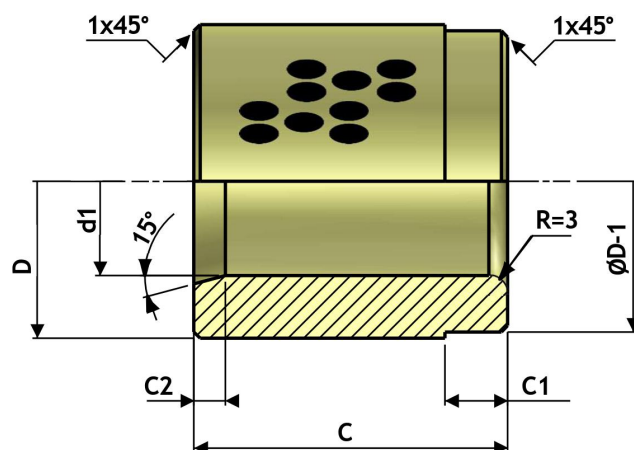


Tabela Dimensional

DXRY - DXRF	d1	D	Toler. (D)	C	C1	C2
25	25	40	$\pm 0,008$	40	10	5
30	30	50	$\pm 0,008$	50	10	5
35	35	60	$\pm 0,0095$	55	15	5
40	40	60	$\pm 0,0095$	60	10	5
50	50	70	$\pm 0,0095$	75	15	5
60	60	80	$\pm 0,0095$	90	20	10
80	80	100	$\pm 0,0095$	120	20	10
100	100	120	$\pm 0,0125$	150	25	10
125	125	140	$\pm 0,0125$	180	25	10